


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

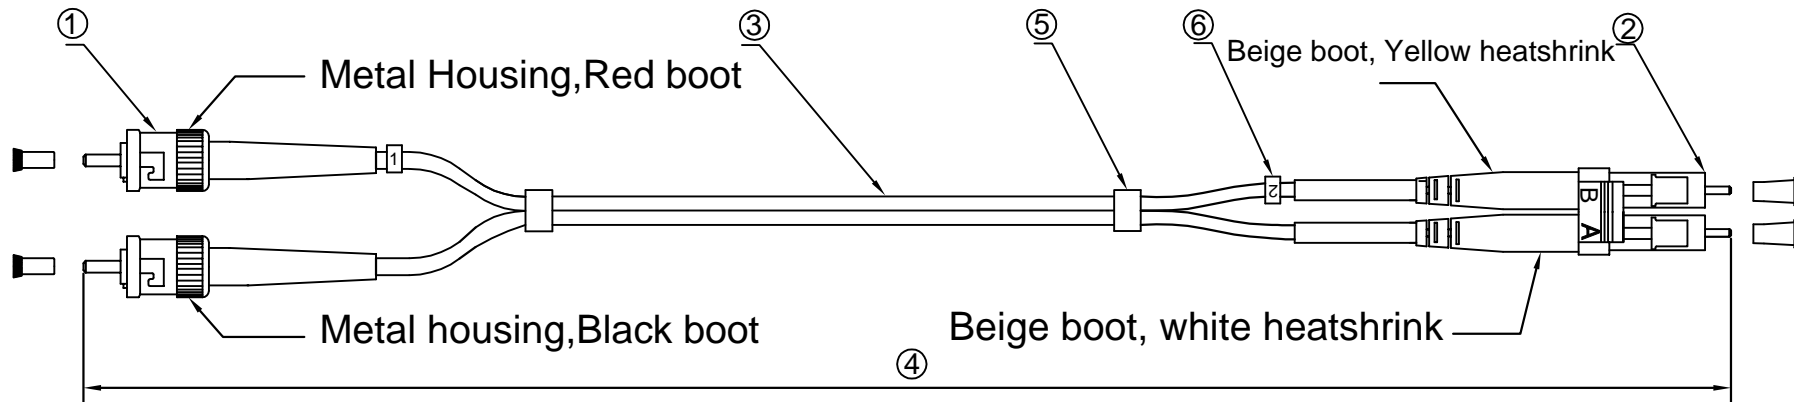

**Specification:**

- 1.Connector Type: ST/PC Multimode
- 2.Connector Type: LC/PC Multimode
- 3.Cable Type:  
Zipcord cable,  $\phi$  1.8mm. 62.5/125um , Multimode,  
Cable Jacket : Orange color, LSZH material
- 4.Length : xM
- 5.Shrink Tube
- 6.Cable Marker

Part Number	Length
LCST-1M	1M
LCST-2M	2M
LCST-3M	3M
LCST-5M	5M
LCST-10M	10M
LCST-15M	15M
LCST-xxM	xxM

**Performance:**

- a. Insertion Loss :<0.3 dB
- b. Increase in insertion loss after 500 mating:0.2 dB Max.
- c. Operation Temperature :-20° to +70°
- d. Storage Temperature :-40° to +80°

UNIT		TITLE	VERSION	
mm		DELTA Fiberkablage LC - ST, duplex, multimode,,XXmeters	1.0	
unless otherwise stated Tolerances mm $\pm 0.3$ XX.XX $\pm 0.2$ X.XX $\pm 0.1$ angular $\pm 2^\circ$		P/N.	DRAWN BY	Leinazi
		MATERIAL	CHECK BY	Michael
		SCALE	PAGE	1/1
			APPROVAL BY	Johnson